




Master 13ACAD

Translucent film for CAD applications

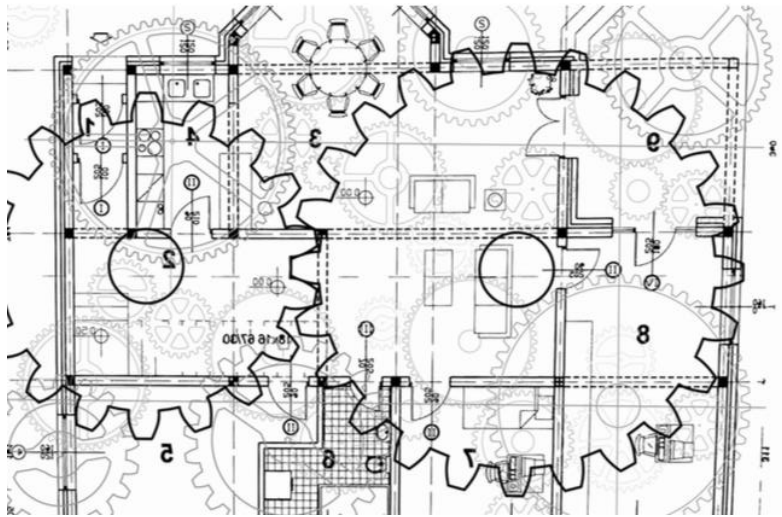

Thickness & Weight

110µm – 130g/m²

Roll Widths & Lengths

914mm-38m / 914mm-50m

Recommended conditions

Printroom 15°C - 30°C, 30% - 65% RH
For use -40°C - 80°C, 10% - 90% RH

For storage 10°C - 20°C, 20% - 50% RH

Shelf Life 24 months after delivery
(under recommended storage conditions)

Compatibility

CAD inkjet printers with pigment inks



Characteristics

- Aimed at the architectural and engineering markets
- For CAD inkjet with pigment inks
- Matt drawing surface on reverse side
- Fast drying and smudge resistant

Applications

- CAD applications

Post Printing Information for Latex & Solvent Inks:

As with all filmic media, this product must be allowed to "Gas-out" after printing. This can be achieved by leaving the prints face up, ideally for 24 hours, to set and harden the unique scratch resistant properties. If unable to do this e.g. with a long print run, after printing the roll stand it vertically and loosely unwind as much as possible, to allow air in and gases out.