




## EXPERT 26BD – 260g/m<sup>2</sup> Pre-Perforated 'dry peel' Badge

Expert 26BD is a 260gsm pre-perforated white PET badge, simplex printable on a dry peel release liner optimised for Production & Digital Press print applications.

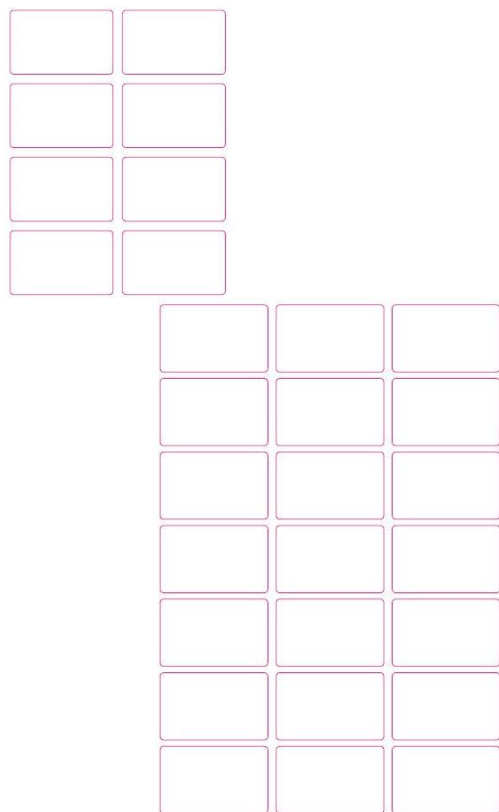

### Physical characteristics

Property	Typical Value	Unit	Test Method
Weight	260 +/- 5	g /m2	Internal Method
Thickness	193 +/- 4	μ	Electronic Micrometer
Opacity	>98	%	TAPPI T519
CIE Whiteness	>138	CIE WI	ASTM E313 DCI Spectraflash ( D65, 10° observer, UV incl.)
Melting Point	250	° C	ASTM E794-85
Usage Temperature	-40 to +120	° C	Internal Method

Availability	Sheets/Pack
A4	100/500
SRA3	100/250
Recommended conditions	
For use	10° C – 30° C, 40% - 55% RH
For storage	10° C – 20° C, 20% - 55% RH
Shelf life	24 months after delivery (under recommended storage conditions)

### Compatibility

Suitable for most thermal transfer and dry toner (laser/LED/flash fusion) print processes, both mono and colour small-volume, mid-volume & production machines. On such machines the user must establish for themselves the optimum settings and paper path, being aware of the thickness and weight of the material. The printable surface is also suitable for screen print, offset litho (using only fully oxidising inks).

### Applications and characteristics:

- ✓ Clean edges
- ✓ Card Size 86mm x 53.7 mm
- ✓ Available in 8 cards per A4-sheet or 21 cards per SRA3 sheet
- ✓ Matt white finish
- ✓ Waterproof, tear-proof, greaseproof
- ✓ No need to laminate
- ✓ Ideal for gym memberships, loyalty cards, ID, business cards

**NOTICE** The information provided herein is correct to the best of our knowledge. No liability for any errors, facts or opinions is accepted. You must satisfy yourself as to the suitability of this product for your application. No responsibility for any loss as a result of any person placing reliance on any material contained herein can be accepted.